


PARALLEL LATHE FOLLOW CE500X2000

Ref: CE500X2000 FOLLOW

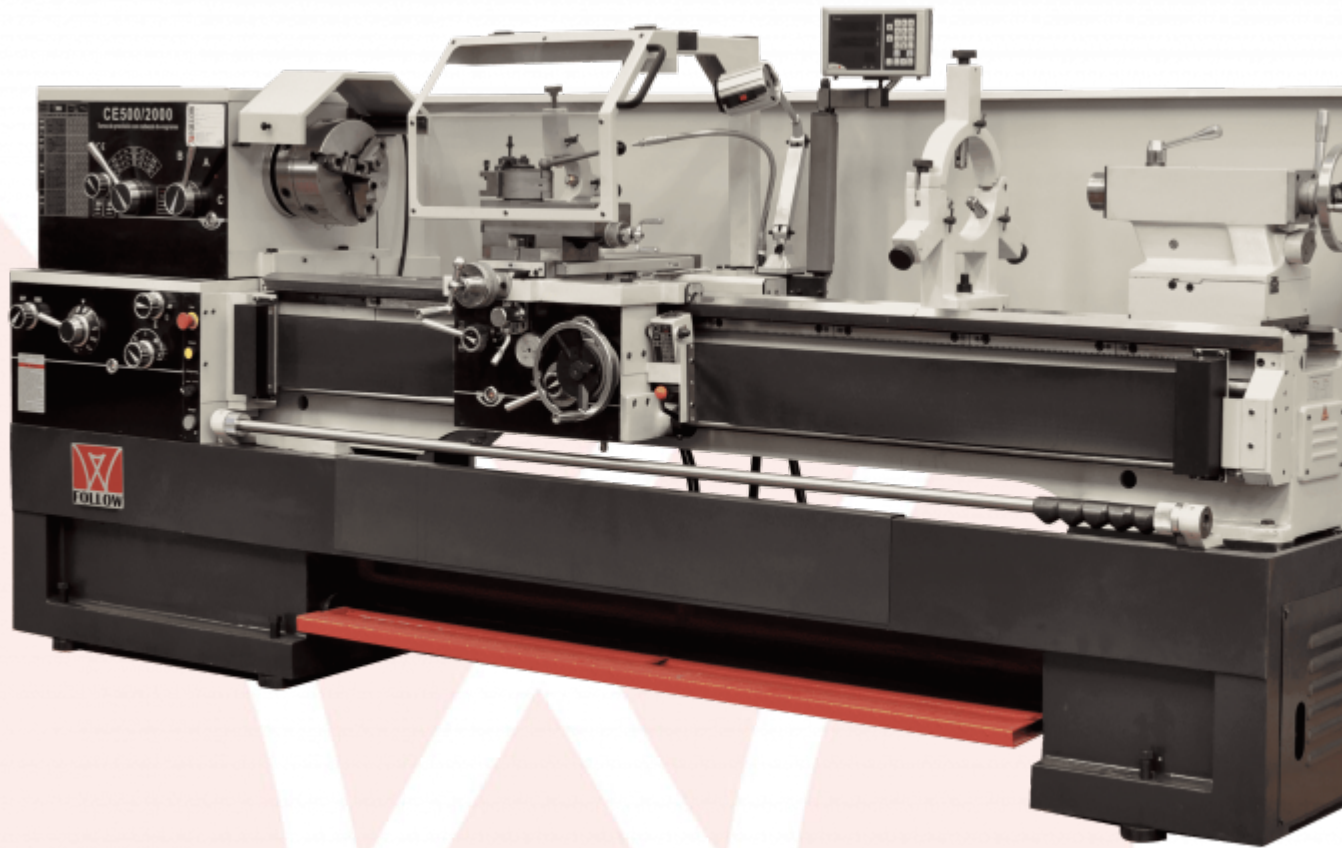

Tech specs

Brand	FOLLOW
Height of points	250 mm
Distance between centers	2000
Swing over bed	500
Swing over ram	740
Swing over carriage	340
Bed width	340
Length gap	310
width charriot	130
Main spindle hole	80
Number of speed ranges of spindle	25-1800 r.p.m
Spindle nose	CAMLOCK Nº8
Main spindle morse taper	7 CM/MT
Longitudinal feed	0,041-2,46
Cross feed	0,02-1,25
Metric pitch	(24) 0,5-20
Pasos Whitworth	(61)1,5/8-72
Modular pitch	(20) 0,25-10
Diametral pitch	(45) 96-31/4
Master spindle pitch	Ø/ 40 x 12DP
Cross carriage travel	290
Carriage travel	135
Max. dimension of tool	25x25
Tailstock morse taper	5 CM/MT
Power of the main motor	5,5/7,5
Power of motor pump	0,09/0.12
Electrical voltage	230-400/50 Hz
Dimensions (length x width x height)	3350x1150x1600
Net weight	3300
Quill diameter	75
Quill travel	150



Standard equipment

- 3 jaw universal chuck Ø250mm
- 4 independant jaw chuck Ø320mm
- Faceplate Ø 410mm
- Drive plate Ø275mm
- Display FAGOR X,Y
- Live center
- 2 dead centers CM3
- Emergency brake
- Steady rest
- Live center
- Quick change tool post with 4 tool holder
- Coolant system
- Work light
- Tool box
- Certificate CE

Images

