

## PARALLEL LATHE FOLLOW CE460VX1500

Ref: CE460VX1500 FOLLOW



## Tech specs


|                                             |                     |
|---------------------------------------------|---------------------|
| <b>Brand</b>                                | FOLLOW              |
| <b>Height of points</b>                     | 230 mm              |
| <b>Distance between centers</b>             | 1500                |
| <b>Swing over bed</b>                       | 460                 |
| <b>Swing over ram</b>                       | 700                 |
| <b>Swing over carriage</b>                  | 300                 |
| <b>Bed width</b>                            | 340                 |
| <b>Length gap</b>                           | 310                 |
| <b>width charriot</b>                       | 130                 |
| <b>Main spindle hole</b>                    | 80                  |
| <b>Number of speed ranges of spindle</b>    | 25-1800             |
| <b>Spindle nose</b>                         | CAMLOCK Nº8         |
| <b>Main spindle morse taper</b>             | 7 CM/MT             |
| <b>Longitudinal feed</b>                    | 0,041-2,46          |
| <b>Cross feed</b>                           | 0,02-1,23           |
| <b>Metric pitch</b>                         | (24) 0,5-20 mm      |
| <b>Pasos Whitworth</b>                      | (61) 1,5/8-72 t.p.i |
| <b>Modular pitch</b>                        | (20) 0,25-10 mp     |
| <b>Diametral pitch</b>                      | (45) 96-31/4        |
| <b>Master spindle pitch</b>                 | Ø/ 40 x 12DP        |
| <b>Cross carriage travel</b>                | 290                 |
| <b>Carriage travel</b>                      | 135                 |
| <b>Max. dimension of tool</b>               | 25x25               |
| <b>Tailstock morse taper</b>                | 5 CM/MT             |
| <b>Power of the main motor</b>              | 5,5/7,5             |
| <b>Power of motor pump</b>                  | 0,09/0,12           |
| <b>Electrical voltage</b>                   | 230-400/50 Hz       |
| <b>Dimensions (length x width x height)</b> | 2950x1150x1600      |
| <b>Net weight</b>                           | 2900                |
| <b>Quill diameter</b>                       | 75                  |
| <b>Quill travel</b>                         | 150                 |



## Standard equipment

---

- 3 jaw universal chuck Ø250mm
- 4 independent jaw chuck Ø320mm
- Faceplate Ø 410mm
- Drive plate Ø275mm
- Display FAGOR X,Y
- Live center
- 2 dead centers CM3
- Emergency brake
- Steady rest
- Follow rest
- Quick change tool post with 4 tool holder
- Carrier
- Coolant system
- Work light
- Tool box
- Certificate CE

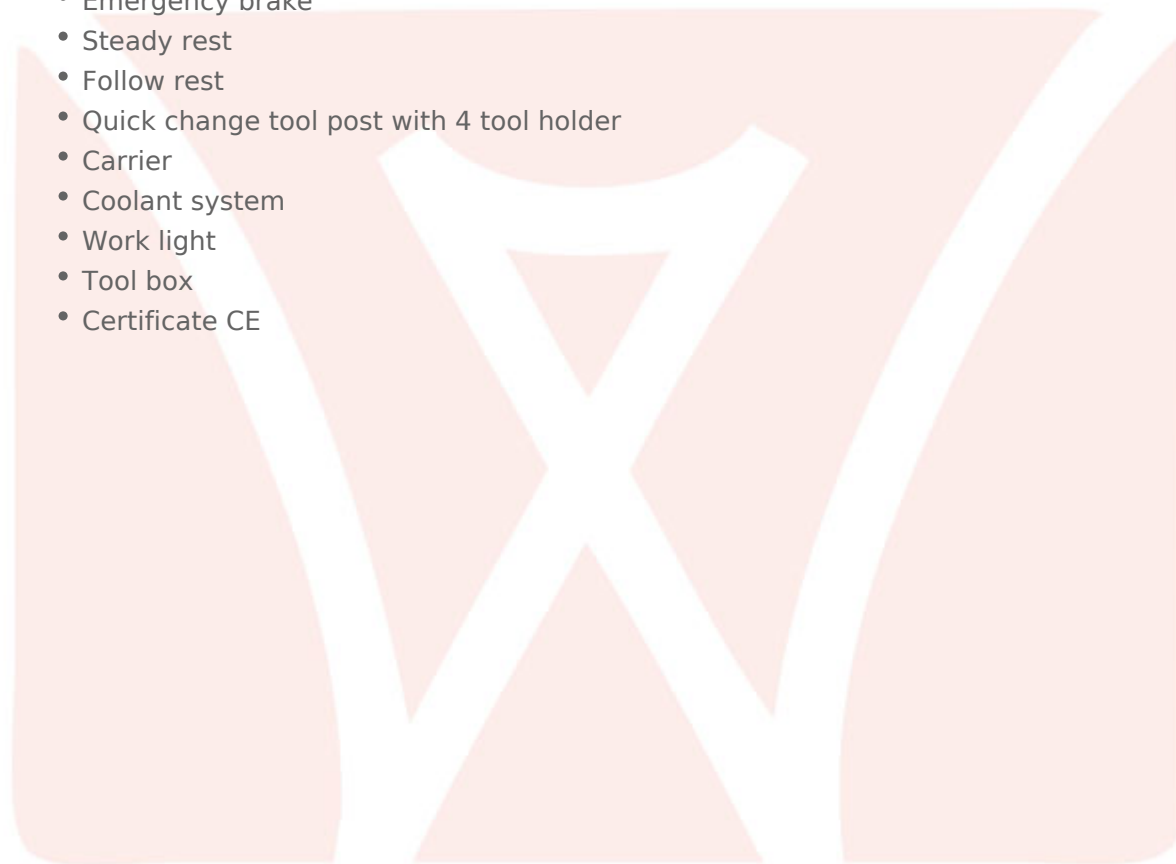

## Images

---

