

VERTICAL TURRET MILLING MACHINE FOLLOW FTV3L

Ref: FTV3L FOLLOW



Tech specs

Brand	FOLLOW
Worktable surface	1670x320
T-slot	3x16
Longitudinal travel	1100
Cross slide travel	410
Longitudinal feed	42-262
Cross feed	42-262
Vertical feed	290
Taper of ram headstock	ISO40
Ram headstock speed range	52-4200
Number of ram headstock speeds	variador
Ram movement	MANUAL
Quill feed	0.04/0,08/0,15
Quill diameter	86
Quill travel	127
Ram travel	458
Main motor power	3,7/5
Distance between the vertical spindle to the table	0-458
Distance spindle/ machine mirror	172-756
Dimensions (length x width x height)	2000x1700x2200
Net weight	1100

Standard equipment

FAGOR DRO X Y Z

Mechanical inverter headstock

Automatic movements X Y

Z-Axis motorized movement

Pneumatic tool clamping device (FTV3&FTV4 Exclusive)

Hardened guideways


Automatic lubrication system

Coolant collect tray

Cooling system

Working light

CE-Certificated

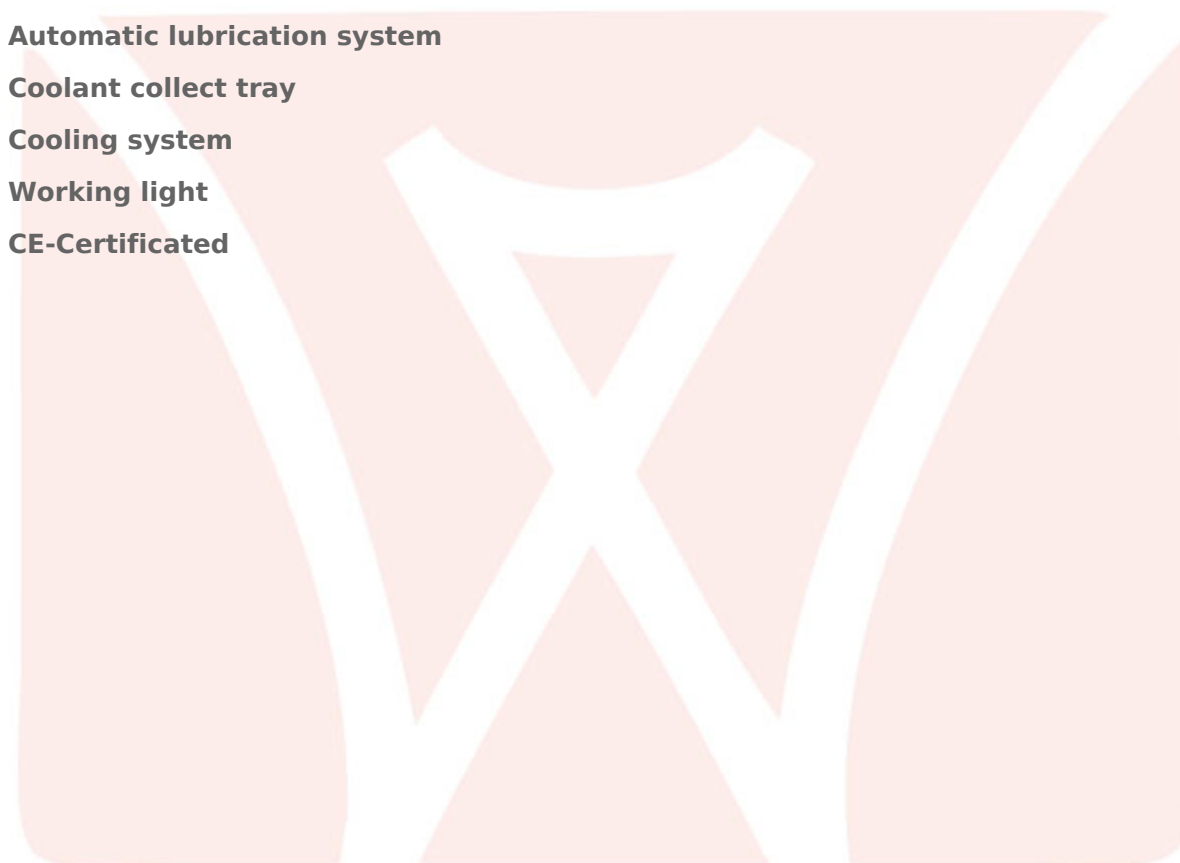

Images

