


LATHE FOLLOW TPH 1030X3000

Ref: TORNO FOLLOW TPH 1030x3000

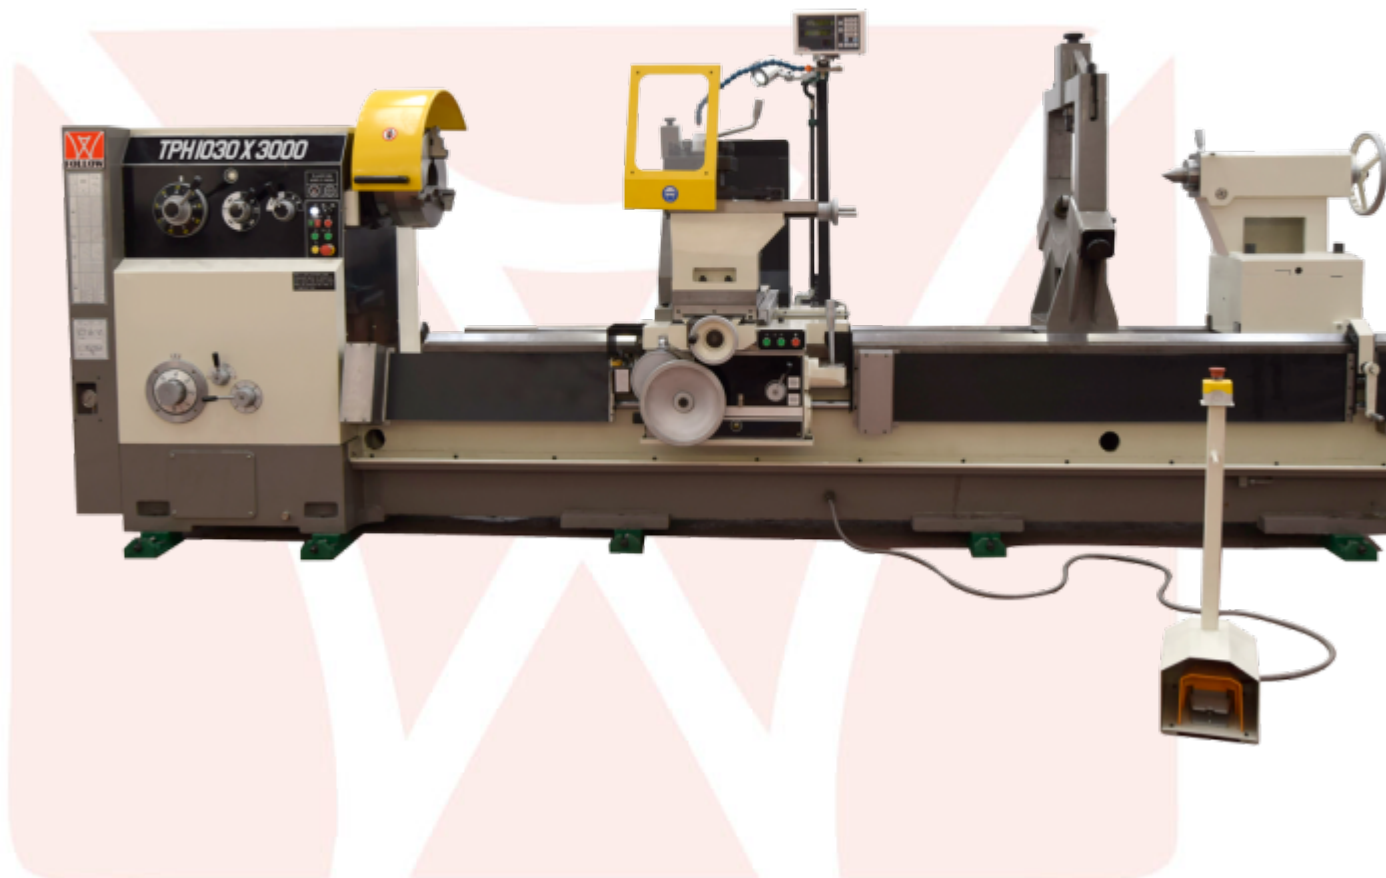

Tech specs

Brand	FOLLOW
Height between centers	500
Distance between centers	3000
Swing over bed	1000
Swing over ram	1250
Swing over carriage	720
Bed width	550
Length gap	340
Main spindle hole	105
Spindle nose	C
Main spindle morse taper	D11
Speed number	18
Longitudinal feed	64(0.1-24,3)
Cross feed	64(0,05-12)
Metric pitch	(50)1-240
Pasos Whitworth	43 (1/16-19)
Modular pitch	53 (0,5-120)
Diametral pitch	42 (30 - 1,8)
Main spindle pitch	12
Cross carriage travel	580
Carriage travel	240
Max. dimension of tool	33X33
Diameter tailstock quill	100
Tailstock morse taper	CM6
Number of speed ranges of spindle	18
Power of motor pump	0,125/0,2
Dimensions (length x width x height)	5015 x 1395 x 1725
Net weight	5800
Tailstock quill travel	300



Standard equipment

FAGOR DRO X,Z

3 jaw self-centering chuck 380 mm

4 independent jaw chuck 500 mm

Steady rest

Follow rest

Dead center

Cooling system

Working light

CE-Certified

